



AGL HMI Framework

Architecture Document

Version		Date
0.2.4		2017/8/2

Index

1. HMI F	Framework overview	4
1.1. HM	II-FW Related components	4
1.1.1.	Related components	5
1.1.2.	HMI-FW Components	6
1.2. Con	siderations on implementation	7
2. HMI-	Apps (HMI-FW Related components)	8
2.1. Ove	erviw	8
2.1.1.	Related external components	
2.1.2.	HMI-Apps Life Cycle	9
	ibrary	
3.1. Ove	erview	10
3.1.1.	Related external components	10
3.1.2.	Internal Components	11
3.2. Gra	phics functions	12
3.2.1.	Procedure necessary for HMI-Apps	12
3.2.2.	Software configuration of GUI-lib.	13
	nd functions	
3.4. Inpu	ut functions	15
3.5. GU	I-lib Standard Funcitions List (Reference material)	16
4. Windo	ow Manager	17
4.1. Ove	erview	17
4.1.1.	Related external components	17
4.1.2.	Internal Components	18
4.1.3.	Window Resources	19
4.2. Wir	ndow Manager Client (API)	25
4.3. Wir	ndow Resources Manager	26
4.3.1.	Register My Application (Window Manager API)	26
4.3.2.	Window Resource Control (Window Manager API)	27
4.3.3.	Allocate/Release Window Resources (Window Manager API)	28
4.3.4.	Notify Window Resources Status (Window Manager API:EVENT)	32
4.3.5.	Recover Window Resources (Boot Sequence)	33
4.4. Wir	ndow Policy Manager	34

4.4.1.	Window Layout Decision	35
4.4.2.	Message Signaling Client	35
4.4.3.	Window Policy DB Control (Window Manager API)	36
4.4.4.	Window Policy DB use cases	36
4.5. Wir	ndow Layout Manager	39
4.5.1.	Change Window Layout	39
4.5.2.	Window Layout DB Control(Window Manager API)	40
4.5.3.	Window Layout DB use case	40
5. Sound	Manager	42
5.1. Ove	erview	42
5.1.1.	Related external components	42
5.1.2.	Internal Components	43
5.1.3.	The Sound Layout and Sound Manager	
5.2. Sou	and Manager Client (API)	
5.2.1.	Register My Application (Sound Manager API)	46
5.2.2.	Sound Resource Control (Sound Manager API)	46
5.2.3.	Allocate/Release Sound Resources (Sound Manager API)	48
5.3. Sou	and Policy Manager	50
5.3.1.	Sound Layout Decision	51
5.3.2.	Message Signaling Client	51
5.3.3.	Sound Policy DB Control (Sound Manager API)	52
5.3.4.	Sound Policy DB use cases	52
5.4. Sou	nd Layout Manager	53
5.4.1.	Change Sound Layout	53
6. Input	Manager	54
6.1. Ove	erview	54
6.1.1.	Related external components	55
6.1.2.	Internal Components	56
6.2. Inpo	ut Manager Client (API)	57
6.3. Inpo	ut Manager Server	58
6.3.1.	Input data from Input Device Driver	58
6.3.2.	Input data from Vehicle Bus Access	60
7. Home	Screen	62
7.1. Ove	erView	62
7.1.1.	Related external components	62
7.1.2.	Internal Components	63


7.2. H	Home Screen CORE API	64
7.3. H	HomeScreen initial processing	65
7.3.1.	Initial setting of 「Window Manager」	65
7.4. H	HomeScreen CORE functions	67
7.4.1.	Shortcut key	67
7.4.2.	Status Bar	67
7.4.3.	Information Bar	68
7.4.4.	Home Key	69
7.4.5.	Apps Area	70
7.4.6.	On Screen Area (Floating Area)	73
7.5. A	Apps shipped with HomeScreen	74
7.5.1.	Apps launcher	74
7.5.2.	Input Method Editor(T.B.D)	75

1. HMI Framework overview

1.1. HMI-FW Related components

The related components are shown below.

(Orange box components included in HMI-FW)

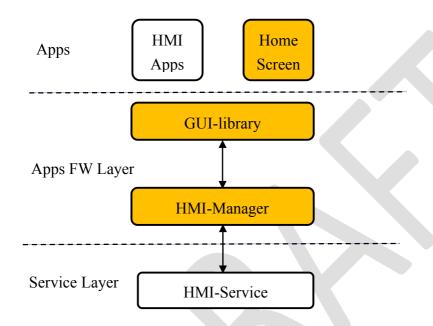

1.1.1. Related components

It is not included in HMI-FW, but related components are shown below.

HMI-Apps

An application including HMI (drawing, voice, input) processing is called HMI-Apps. HMI-Apps expresses HMI by calling components of HMI-FW.

HMI-Apps has the following responsibilities

- ✓ HMI-Apps is used after requesting the HMI resource required for HMI-Manager
- ✓ HMI-Apps will do the appropriate processing when the HMI rights are deprived from Manager

HMI-Services

It belongs to AGL Service Layer by HMI (drawing, voice, input) control software.

- ✓ Graphics Subsystem : Weston/Graphics Device Driver
- ✓ Sound Subsystem: Audio Manager/ALS
- ✓ Input Subsystem : Input Device Driver/Vehicle Bus Access

1.1.2. HMI-FW Components

Components of the HMI-FW are shown below.

GUI-library

OEM can select the GUI-library (e.g. Qt, HTML5, JavaFX, EB) suitable for HMI with the software necessary for representing HMI.

- ✓ 2D/3D Graphics、Image Output
- ✓ Sound Output
- ✓ Input Event

HMI-Manager

HMI-Manager located between upper GUI-library and lower HMI-Service and has the following components for each HMI.

- ✓ Window Manager
- ✓ Sound Manager
- ✓ Input Manager

Home Screen

Home Screen have an auxiliary screen other than the application screen and interact with the user.

There are various Home screens, but the following representative auxiliary screens are shown below.


- ✓ Short Cut Bar
- ✓ Status Bar
- ✓ Onscreen Bar

1.2. Considerations on implementation

Since HMI-Manager often has different functions depending on OEM and system, it should be separated from HMI-Service.

However, if implemented according to this specification, the application calls HMI - Service twice, and performance and sequence issues remain.


Therefore, it is also possible to implement the integration of HMI - Manager and HMI - Service modules.

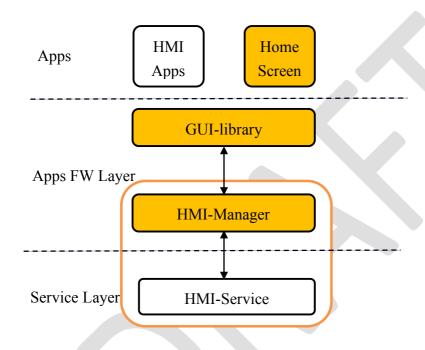

2. HMI-Apps (HMI-FW Related components)

2.1. Overviw


2.1.1. Related external components

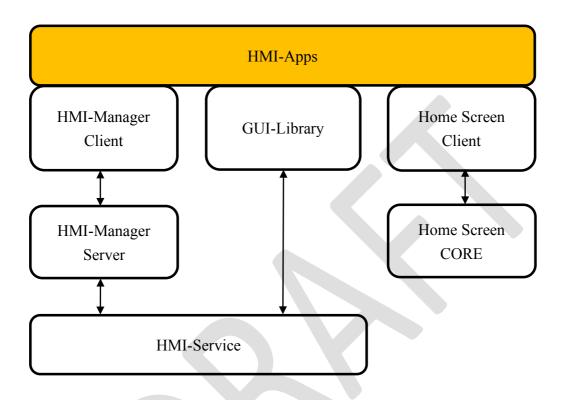

2.1.2. HMI-Apps Life Cycle

HMI-Apps receives events from each component and performs optimum processing.

Life Cycle

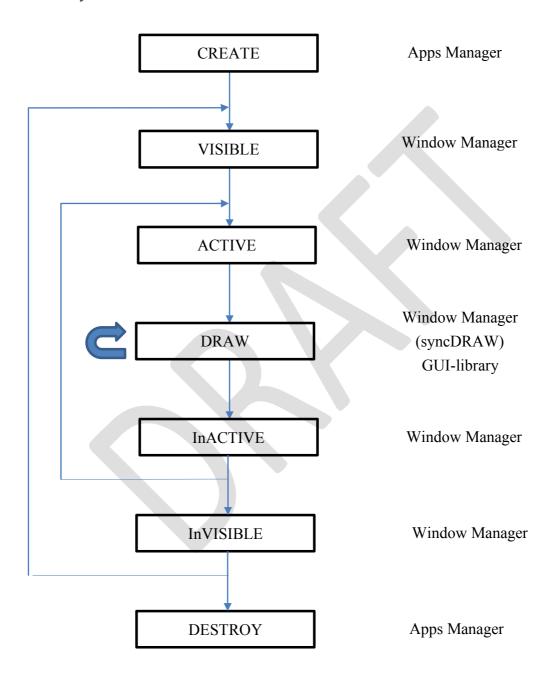

3. GUI-library


3.1. Overview

GUI-library is a library that provides HMI functions to applications, and mainly has HMI functions related to graphics, sound, and input.


3.1.1. Related external components

The application developer selects the GUI-library (e.g. Qt, HTML5, JavaFX, EB) according to the required HMI expression, and issues Upper API depending on each GUI-Library.

(As API functions depends on each GUI-library, refer to each specification.)

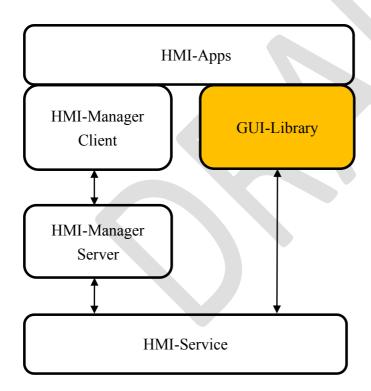

3.1.2. Internal Components

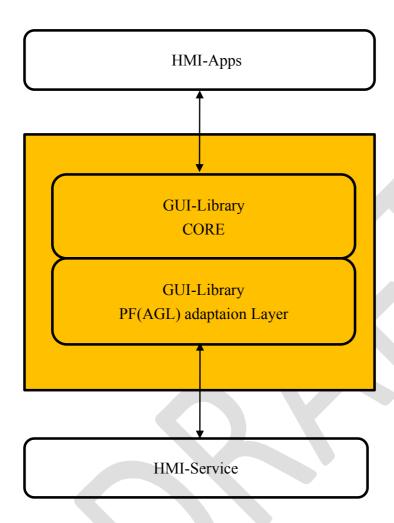


3.2. Graphics functions

Graphics provides rendering functions to the application.

3.2.1. Procedure necessary for HMI-Apps

Graphics draws with the following procedure.

- ① The application requests Weston to acquire Surface
- ② The application makes Area request to Window Manager (OEM options)
- ③ The application inputs and outputs Graphics data with the Graphics Device Driver.

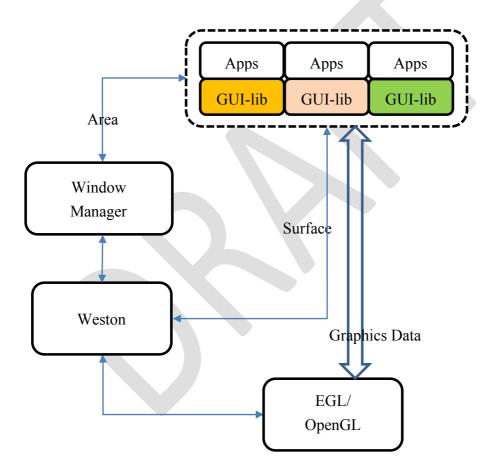


3.2.2. Software configuration of GUI-lib

GUI-lib has an API specific to AGL besides the standard drawing API.

Software vendors providing GUI-lib do not modify GUI-lib CORE, but need to delete functions other than GUI prescribed in AGL.

Software vendors need to remodel PAL(*) according to AGL.


(*) PAL = PF Adaptation Layer

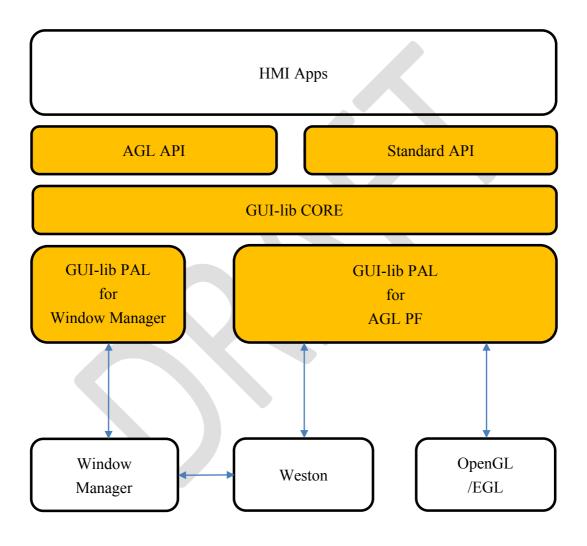

3.3. Sound functions


Sound provides sounding functions to the application with the following procedure.

- ① The application requests ALSA to acquire Stream.
- ② The application makes zeon request to Sound Manager (OEM options)
- The application inputs and outputs Sound data with the Sound Device Driver.

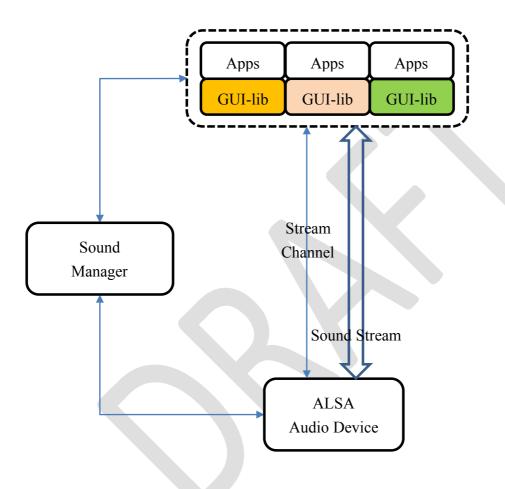

3.4. Input functions

For input under the control of GUI-lib, input function provides the information to Apps according to the method of GUI-lilb.

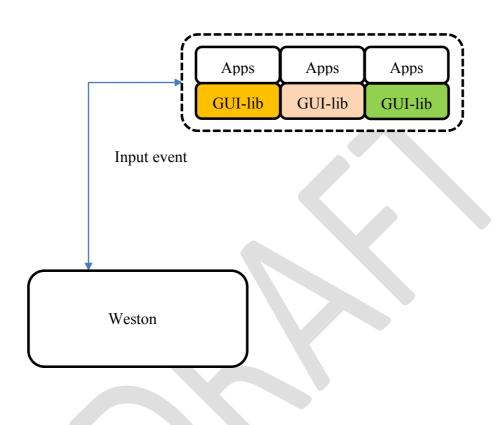

3.5. GUI-lib Standard Funcitions List (Reference material)


	Fuctions	Qt		JavaFX		Description
2D	Window	Qt GUI	\bigcirc	Stage	\circ	
				Popup-Widnow		
	Canvas	Painter2D	0	Canvas2D	\triangle	
		WebView		WebView		
3D	SceneGraph	Material	0	Camera/Light	\bigcirc	SceneGraph (Data
		Transfrorm		Transform		Structure) neither Qt
		Animation		Visual Effect		nor JavaFX is not
		Clip-Node		Pick		Open.
		Opacity		Sub-Scene		
	Graphics	OpenGL/ES	0	2D Share	Δ	
		Canvas 3D		3D Share		
		(WebGL)				
	ML	QML	0	FXML	\circ	
ETC	Package	Qt package	\triangle	Java OSGI	\bigcirc	
	MultiMedia	Audio	0	Audio	\triangle	
		Video		Video		
		Camera				
		Radio		_		
	Input	Mouse	0	Mouse	\bigcirc	
		Gesture		Gesture		

4. Window Manager

4.1. Overview


Window Manager determines the optimum screen layout and controls the screen, based on the request from the HMI-Apps.

4.1.1. Related external components

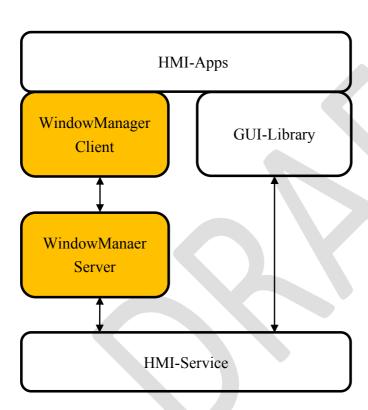

4.1.2. Internal Components

No	Function	Description
1	Window Manager Client	API
2	Window Resource Manager	Window Resource Management
3	Window Policy Manager	Mediation of Window Resources
4 WIndow Layout Manager Window Layout Management		Window Layout Management

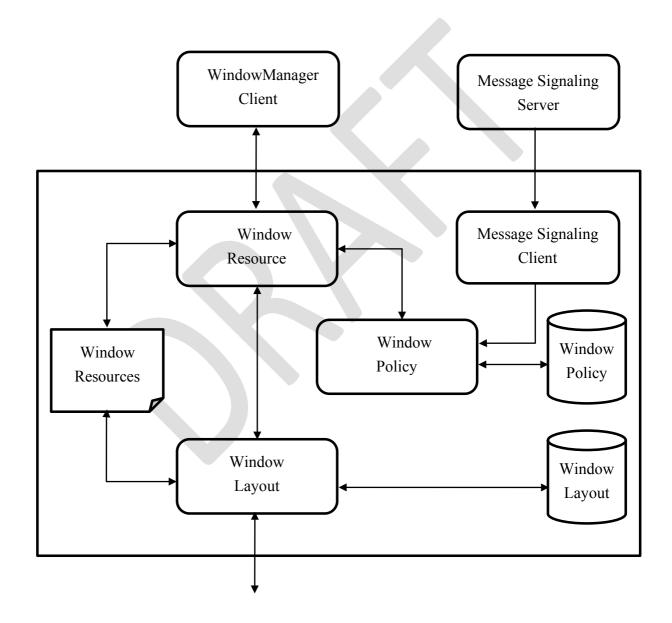

4.1.3. Window Resources

Window Resources are resource information related to the screen managed by the Window Manager and varies depending on the in-vehicle unit configuration (e.g. display).

The data items included in Window Resources are shown below.




Display

Display has information on the display device.


A Display can have multiple Layers.

No	Name	Information Source	Description
1	ID	Graphics Subsystem	Display ID
2	Name	_	Display Name
3	Size	Graphics Subsystem	Display Width and Hight

For vehicles with multiple displays it is assumed to have multiple Window Manager.

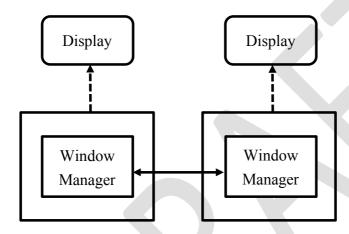


The Window Manager maintain the link state of the window resources.

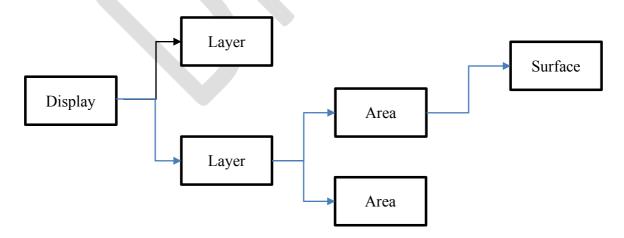


Layer

 $\lceil Layer \rfloor$ is the information representing the depth of display.

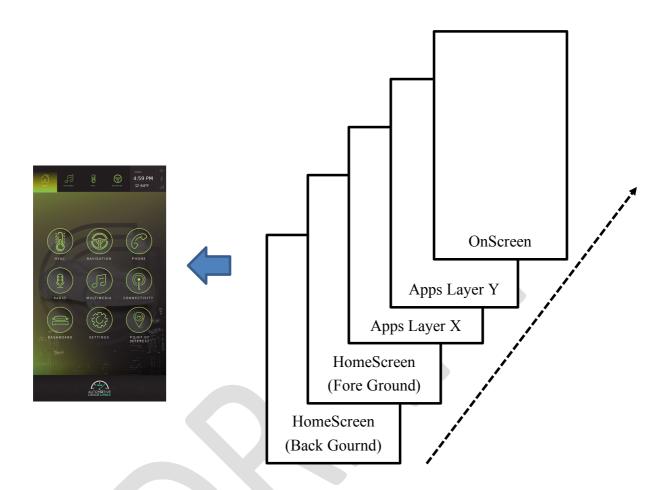

A layer can maps multiple areas.

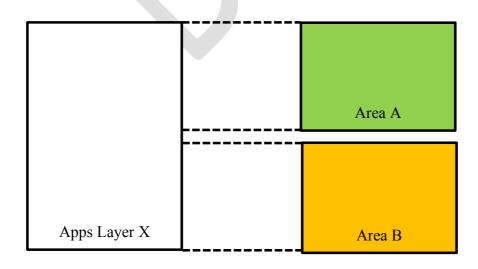

Copyright (c) 2017 TOYOTA MOTOR CORPORATION

No	Name	Information Source	Description
1	ID	Home Screen	Layer ID
2	Name	Home Screen	Layer Name
3	Z order	Home Screen	Layer Zorder
4	Visibility	Home Screen	Layes Visibility Status
5	Alpha	Home Screen	Layer Transparent Ratio (a Blend)
	Blend		




Area

The Area is the information of the area where the application draws.

A Area maps one Parent Surface.

Parent Surface can have multiple child Surfaces.

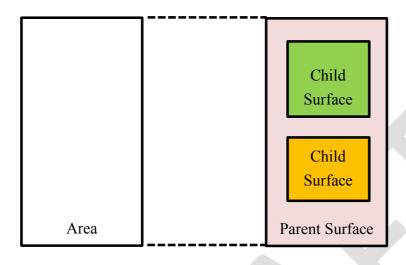

No	Name	Information Source	Description
1	ID	Application	Area ID
2	Name	Application	Area Name
3	AppID	Application	Application uniqu ID
4	Pid	Application	Application Process ID
5	Parent ID	Application	Parent Surface ID
6	Child ID	Application	Next Child Surface ID
7	Position		Area Position
8	Size	J	Area Width and Hight
9	Z order		Area Z order
10	Visibility	_	Area Visibility Status

Surface

Surface is information of display material frame buffer managed by Graphics Subsystem (Weston).

No	Name	Information Source	Description
1	ID	Application	Surface ID
2	SourceSize	Application	FrameBuffer Size
3	Position	_	Surface position
4	Size	_	Width and Hight
5	Z order	_	Surface Z order
6	Visibility	1	Visibility Status
7	Alpha	_	Transparent Ratio (α Blend)
	Blend		

How to create Surface ID

Layer ID [31:24]	Area ID [23:16]	Surface ID [15:0]	
	(Parent Surface ID)		

How to create Zorder

Layer Zorder [31:24]	Area Zorder [23:16]	Surface Zorder [15:0]
----------------------	---------------------	-----------------------

4.2. Window Manager Client (API)


The API is shown below.


No	Function	R/W	Description
1	Register My Application	W	Registration Own App(AppID)
2	Window Resources Control	R/W	Get/Set Window Resources
3	Allocate Window Resources	W	Request Allocate Area(AreaName)
4	Release Window Resources	W	Request Release Area(AreaName)
5	Notify Window Resources Status	R	Post Window Resources Status to Apps
6	Window Policy DB Control	R/W	Get/Set Policy DB
7	Window Layout DB Control	R/W	Get/Set Layout DB

4.3. Window Resources Manager

4.3.1. Register My Application (Window Manager API)

When an application uses WindowManager, registration of the application is necessary.

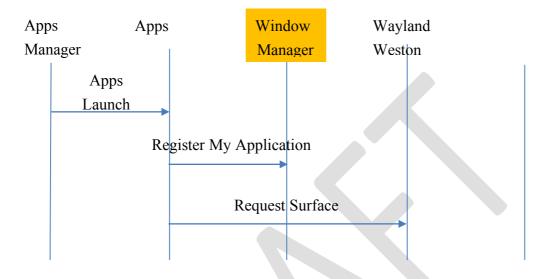


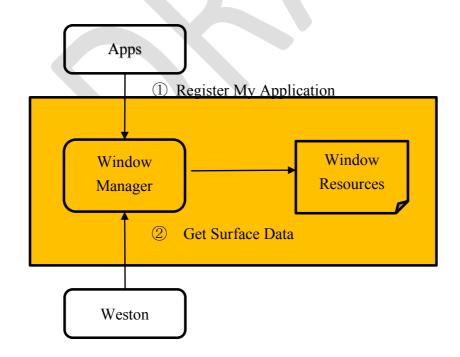


4.3.2. Window Resource Control (Window Manager API)

HMI Apps can Get/Set Window Resources.

- ✓ HomeScreen Get/Set Display and Layer Info.
- ✓ HMI-Apps Set/Set Area Info.

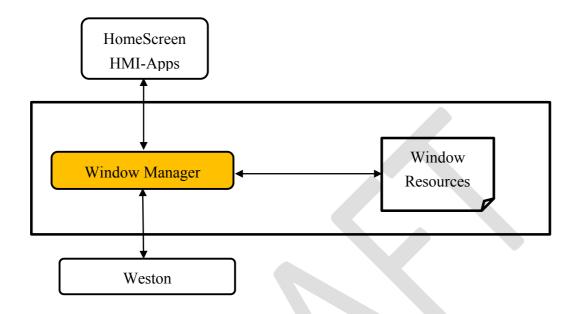

Use Case of Set Change Layer by Home Screen

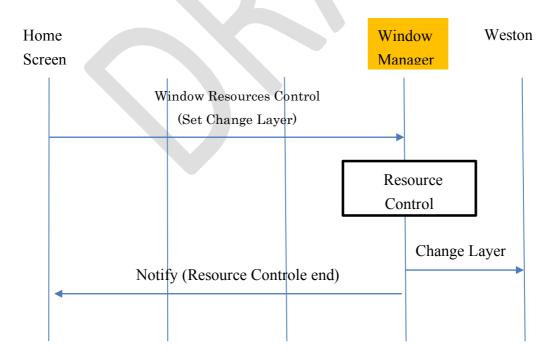

4.3.3. Allocate/Release Window Resources (Window Manager API)

When the application starts drawing, it is necessary to acquire Window Resources.

Use Case of Allocate Window Resources


The use cases in which the MediaPlayer displays the song list during Navi map display are shown below.

Display of MediaPlyaer is done with shortcut key on HomeScreen Top Bar.

After


Ton Bar	Top Bar
Top Bar	Тор Баг
Navi Map	Navi
	Map
	MediaPlyaer
	Song list
Bottom Bar	Bottom Bar

Before

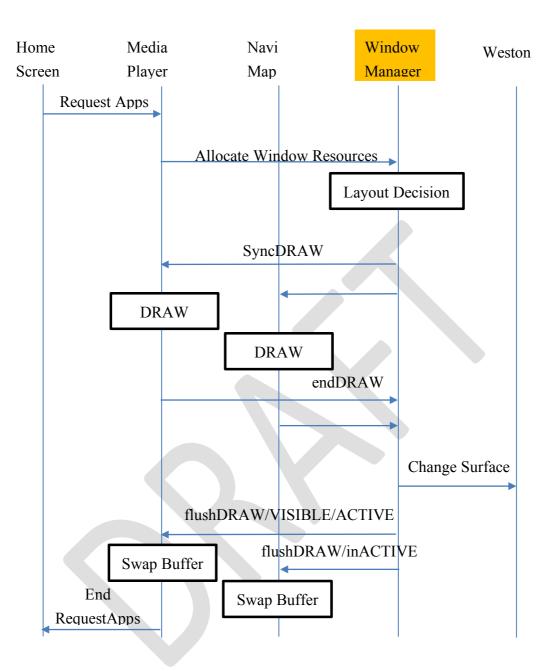


The internal sequence of WindowManage during 「AllocateWindowResources」 execution is shown below.

- ① The app issues 「AllocateWindowReasources」 to Window Policy Manager.
- ② Window Reasources Manager respons to App. The App draw own area.
- ③ Window Reasources Manager rsposns to another App. The App draw own Area.
- 4 Window Reasources Manager receive \[\text{endDRAW} \] from Apps
- ⑤ Window Reasources Manager issues 「ChangeLayout」 to Window Layout Manager

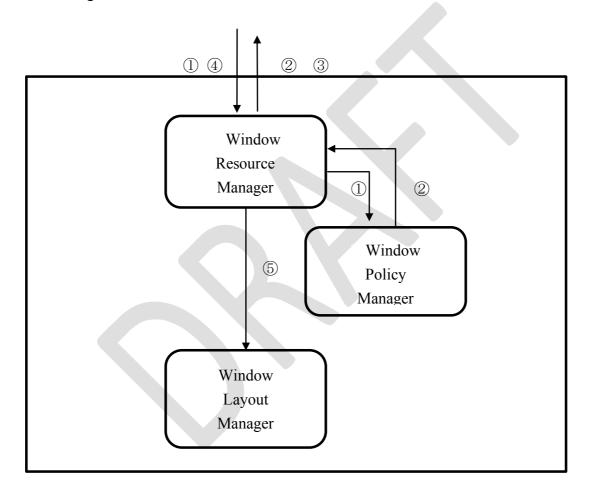

Use Case of inVISIBLE Window Resources

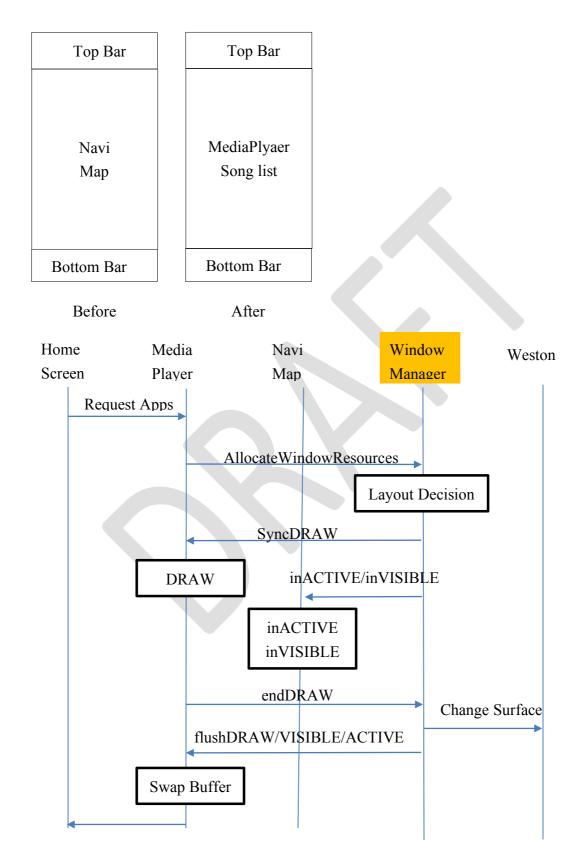

Copyright (c) 2017 TOYOTA MOTOR CORPORATION

4.3.4. Notify Window Resources Status (Window Manager API:EVENT)


Window Manager notifies the application at the event when the situation of Winodw Rersources changes.

No	EVENT	R/W	Description
1	VISIBLE	R	When own Area becomes Visible
2	inVISIBLE	R	When own Area becomes InVisible
3	ACTIVE	R	When own Area becomes Active
4	inACTIVE	R	When own Area becomes inActive
5	syncDRAW	R	The app must draw own Area.After the end, response <code>[endDRAW]</code> .
6	flushDRAW	R	The app must flush own Area.

4.3.5. Recover Window Resources (Boot Sequence)

The Window Manager always holds current window resources.

After reboot, Window Manger recoverd the Last Window resources.

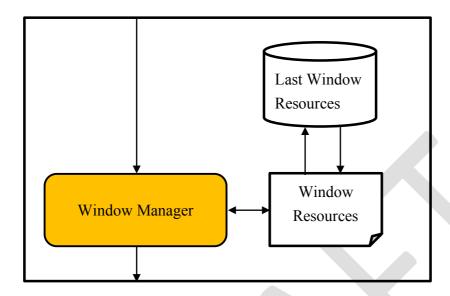

4.4. Window Policy Manager

When there is a screen request from the application due to a user operation or a state change of the system, It is common to erase the old screen and display a new screen. But, Setting an optimum screen layout in consideration of the following conditions is an important requirement of an in-vehicle HMI.

- Application Priority
- Driving restrictions


This requirement is called "HMI Policy".

However, HMI Policy is often different for each OEM and each in-vehicle device. So, Window Policy Manger have policy logic based on PolicyDB prepared in advance.



4.4.1. Window Layout Decision

According to a request from "Window Resource Manager", Window Policy Manager decides Layout based on Window Policy DB and responds to Window Resource Manager.

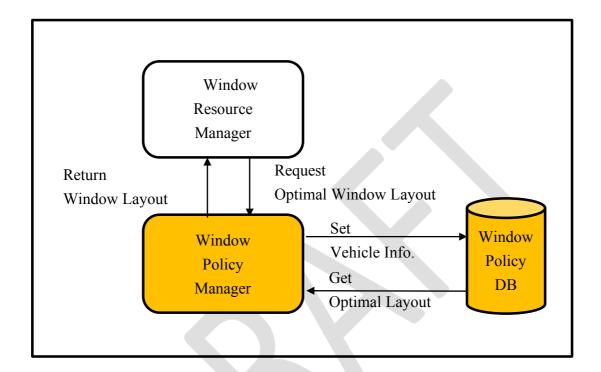

4.4.2. Message Signaling Client

Policy Manager acquires latest vehicle information from Message Sginaling.

4.4.3. Window Policy DB Control (Window Manager API)

Update the Window Policy DB with the following timing.


- ✓ Hardware in-vehicle unit setting
- ✓ Software

 Software update, Application delivery

4.4.4. Window Policy DB use cases

Window Layer Pattern (have 2 Layers)

- ① Base Layer (HomeScreen Layer)
- ② Apps Layer

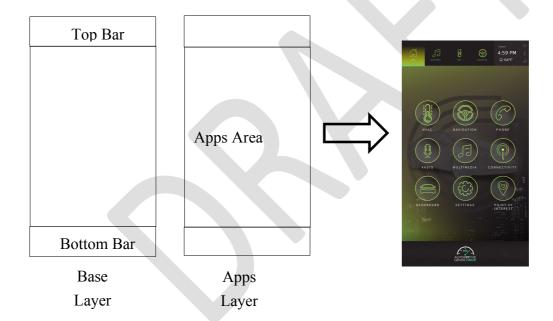


Apps Layout Pattern (have 2 types)

TopBar	TopBar
FULL	MAIN
FULL	SUB
BottomBar	BottomBar
FULL	HALF

Apps display capability

	FULL	HALF	
		MAIN	SUB
HOMESCREEN	0	_	_
NAVI	0	0	_
BASE (Others Apps)	0	0	0

Policy DB State Machine



① STOP

The state transition table during STOP is shown below.

In the case of driving start, save the current state and shift to the RUN state.

STOP

	MAIN	SUB	HOME	NAVI	BASE
Hs	HOME	HOME	_	To n1	To b1
n1	NAVI	NAVI	To Hs	-	To n2
n2	NAVI	*	To Hs	To n1	MAIN:NAVI
					SUB:BASE
b1	BASE	BASE	To Hs	To n1	1
b2	BASE	*	To Hs	To n1	To b1

First Row: State Name

Second Row and Third Row: Area Name

(When MAIN and SUB are the same, it is regarded as FULL screen)

The action after the 4th Row for the application request (State Machine Table)

* : Other applications different from MAIN

② RUN

The state transition table during RUN is shown below.

In the case of stopping, restore the current state and shift to the STOP state.

RUN


	MAIN	SUB	HOME	NAVI	MM	BASE
n1	NAVI	NAVI	_	_	_	-

4.5. Window Layout Manager

The Window Layout Manager has the following functions related to Layout.

4.5.1. Change Window Layout

If Window Layout Manager receive 「Change Window Layout」
They need update Window Resources and send 「Change Surfase」 to Weston.

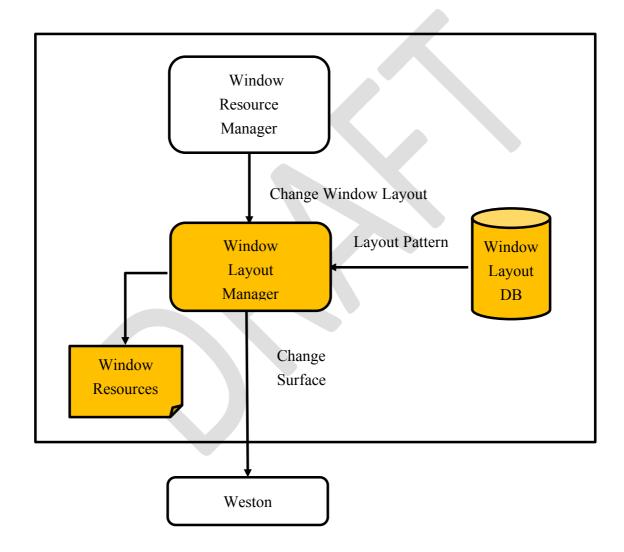

4.5.2. Window Layout DB Control(Window Manager API)

Update the Window Layout DB with the following timing.

- ✓ Hardware in-vehicle unit setting
- ✓ Software

 Software update, Application deliver

4.5.3. Window Layout DB use case

The layout Pattern Data is shown below together with data description (JSON).

Layout Pattern (have 2 patterns)

- ① HomeScreen Basic
- ② Apps Half Basic

Basic

Top Bar	
	Apps A
	Apps B
Bottom Bar	
HomeScreen	Apps Half Basic

Pattern Description (JSON sample)

```
Display_height=1920;
Display width =1024;
TopBar_height =200;
BottomBar height=200;
Apps_height= (Display_height- TopBar _ height- BottomBar_ height)/2;
Main_y = TopBar_height;
Sub_y= Main_y+Apps_height;
BottomBar _y= Sub_y+ Apps_height;
HomeScreen Layer z = 0x10 << 24;
Apps Layer z = 0x30 << 24;
     Home Screen Basic (Home Screen Layer)
```

```
"Layout"
           "name":"HomeScreenBasic"
           "areas":
           [{
                      "name": "TopBar", "x":0, "y":0, "width": display width,
                          "height": "display_height", "zorder": HomeScreen_Layer_z
           },
                      "name": "BottomBar", "x":0, "y": BottomBar_y, "width": display_width,
                          "height": "Display_height", "zorder": HomeScreen_Layer_z
           }]
}
```

Apps Half Basic (Apps Layer)


```
"Layout"
           "name": "ApssHalfBasic"
           "areas":
           [{
                      "name":"Main", "x":0, "y": Main_y,
                         "width":Display_width, "height": Apps_height, "zorder": Apps_Layer_z
           },
                      "name":"Sub", "x":0, "y": Sub_y,
                         "width":Display_width, "height": Apps_height, "zorder": Apps_Layer_z
           }]
```

5. Sound Manager

5.1. Overview


Sound Manager determines the optimum sound layout and controls the sound、based on the request from the HMI-Apps.

5.1.1. Related external components

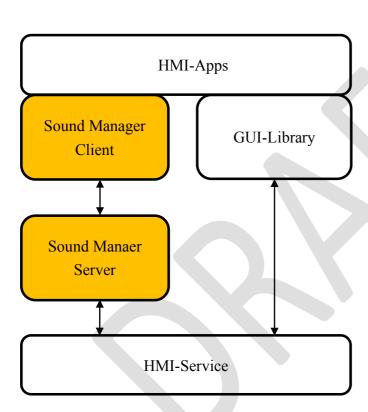

5.1.2. Internal Components

No	Function Description			
1	Sound Manager Client	API		
2	Sound Resource Manager	Sound Resource Management		
3 Sound Policy Manager Mediation of Sound Resource		Mediation of Sound Resources		
4	Sound Layout Manager	Sound Layout Management		

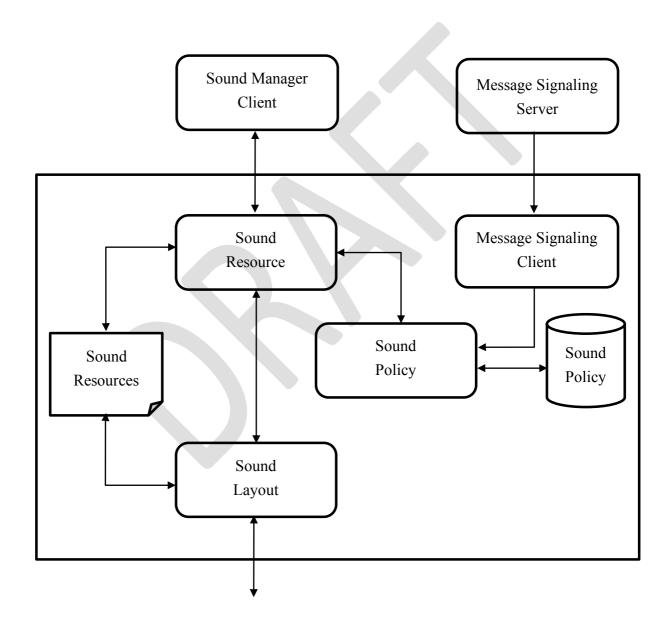


5.1.3. The Sound Layout and Sound Manager

The sound system has the following two sound nodes.

✓ Source: Input Sound Node✓ Sink: Output Sound Node

The connection state of the node is called Sound Layout.

After the 「Sound Policy Manager」 decides to reconfigure the Sound Layout according to the request from the application, 「Sound Layout Manager」 controls connection and disconnection between source and sink

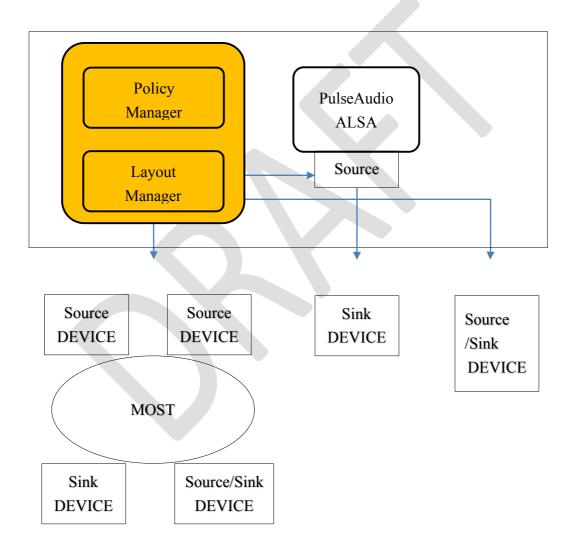

5.2. Sound Manager Client (API)


The API is shown below.

No	Function	R/W	Description
1	Register My Application	W	Registration Own App
2	Sound Resources Control	R/W	Get/Set Sound Resources
3	Allocate Sound Resources	W	Request Allocate Resources
4	Release Sound Resources	W	Request Release Resources
5	Notify	R	Post Sound Resources status to Apps
	Sound Resources Status		
6	Sound Policy DB Control	R/W	Get/Set Policy DB




5.2.1. Register My Application (Sound Manager API)

When an application uses Sound Manager, registration of the application is necessary.

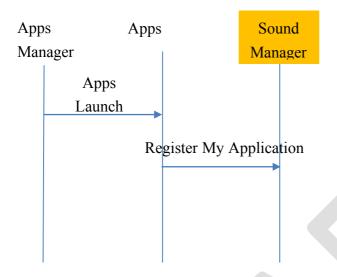


5.2.2. Sound Resource Control (Sound Manager API)

HMI Apps Get/Set Sound Resources.

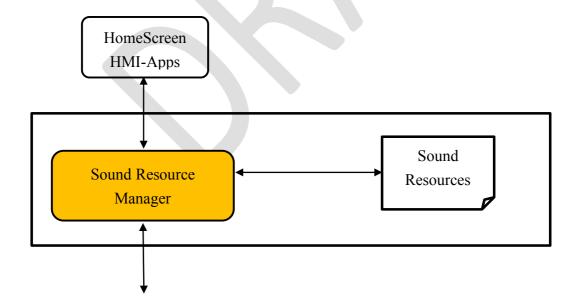

Use Case of Set Volume

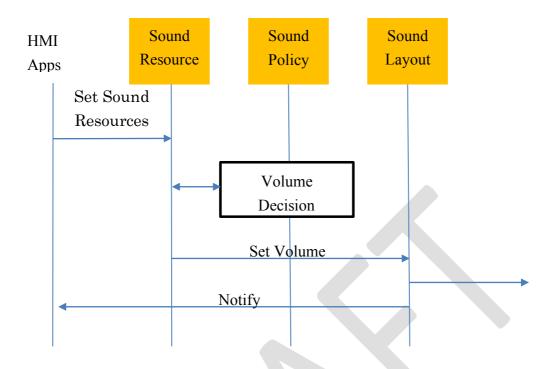


5.2.3. Allocate/Release Sound Resources (Sound Manager API)


When the application starts sounding, it is necessary to acquire Sound Resources.

Use Case of Allocate Sound Resources

The use cases are shown below.

- ① Listening to music with Media Player
- ② A radio is selected (normal)
- ③ Navi requires a voice guide (Interrupt)
- 4 Back to the radio

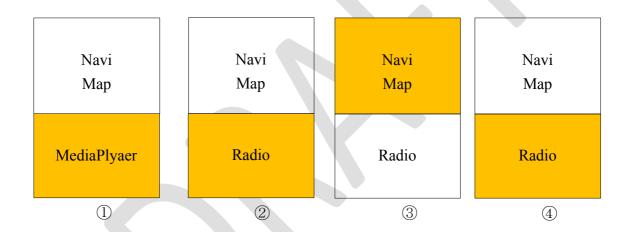

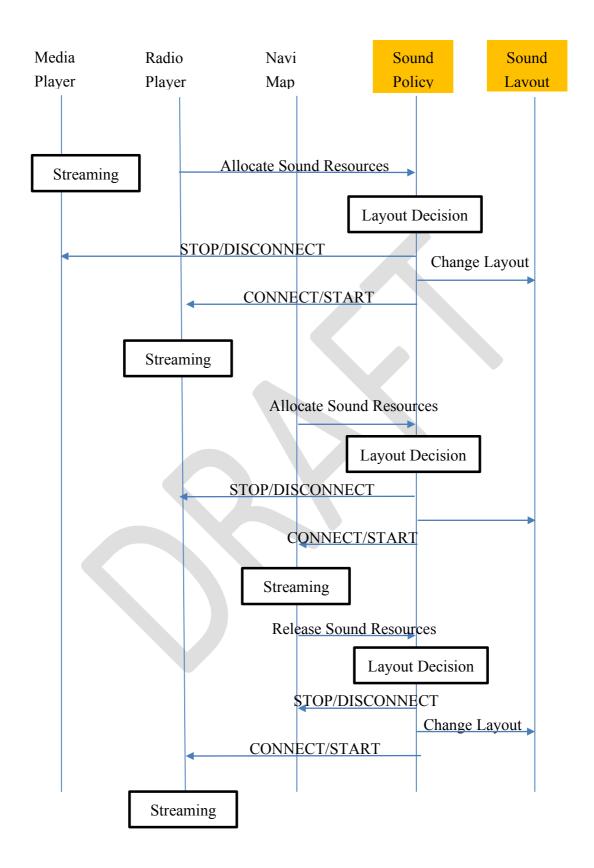

5.3. Sound Policy Manager

When there is a screen request from the application due to a user operation or a state change of the system, It is common to erase the old screen and display a new screen. But, Setting an optimum screen layout in consideration of the following conditions is an important requirement of an in-vehicle HMI.

- Application Priority
- Driving restrictions


This requirement is called "HMI Policy".

However, HMI Policy is often different for each OEM and each in-vehicle device. So, Window Policy Manger have policy logic based on PolicyDB prepared in advance.



5.3.1. Sound Layout Decision

According to a request from "Sound Resource Manager", Sound Policy Manager decides Layout based on Sound Policy DB and responds to Sound Resource Manager.

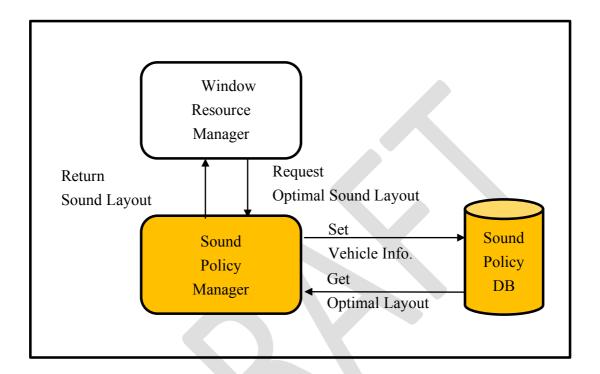

5.3.2. Message Signaling Client

Policy Manager acquires latest vehicle information from Message Sginaling.

5.3.3. Sound Policy DB Control (Sound Manager API)


Update the Sound Policy DB with the following timing.

- ✓ Hardware in-vehicle unit setting
- ✓ Software

 Software update, Application delivery

5.3.4. Sound Policy DB use cases

Policy DB State Machine

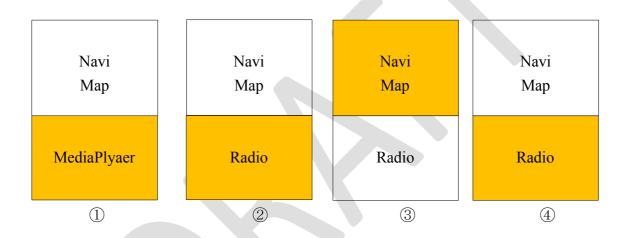

	MP	Radio	Navi(Start)	Navi(Stop)
MP	_	To RADIO	PUSH Status(MP)	
			To NAVI	
RADIO	To MP	_	PUSH Status(MP)	
			To NAVI	
NAVI	_	_	_	POP Status
				To Status

First Row: State Name


The action after the 2th Row for the application request (State Machine Table)

5.4. Sound Layout Manager

The Sound Layout Manager has the following functions related to Layout.

5.4.1. Change Sound Layout

If Sound Layout Manager receive 「Change Sound Layout」, they need control Source and Sinks.

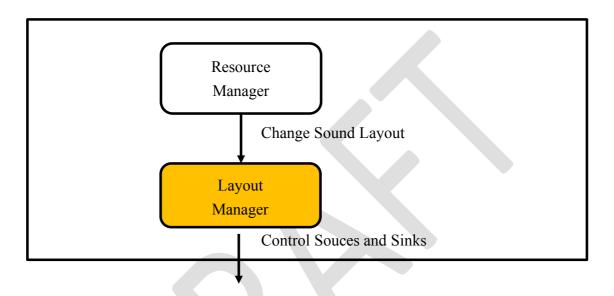

The Layout Manager has a mechanism of plug-in so that it can add a new sound device. Individual plugins have different sources and sinks.

MOST plugin
Sourcs, Sinks

ALSA plugin
Sourcs, Sinks

6. Input Manager


6.1. Overview

Input Manger provides access to HMI-Apps about input data. Input Manager accepts input data request from HMI-Apps, and deliver the requested input data.



6.1.1. Related external components


Input Manager doesn't handle the the input data that get from Weston in the HMI-Service and processed by GUI-Library.

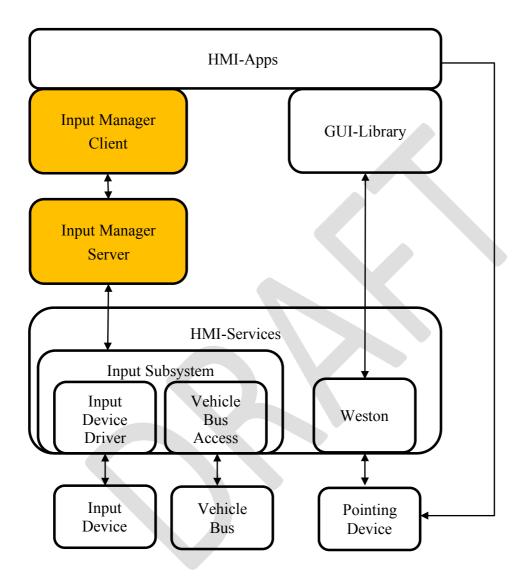

Pointing Device is configured so that Weston can handle it. If Pointing Device such as haptic device needs control value for operation feedback, HMI-Apps set the control value to the Pointing Device.

6.1.2. Internal Components

No	Function	Description	
1	Input Manager Client	API	
2	Input Manager Server	Integrates input data delivery	

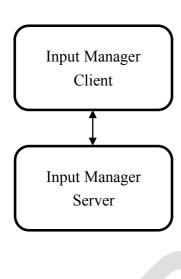

6.2. Input Manager Client (API)

The API is shown below.

No	Function	R/W	Description
1	Input data request	R	Request input data
2	Stop delivery	R	Stop input data delivery




6.3. Input Manager Server


Input Manger server operates differently according to the type of Input Subsystem.

6.3.1. Input data from Input Device Driver

Examples of specific devices include steering switches, panel switches, etc.

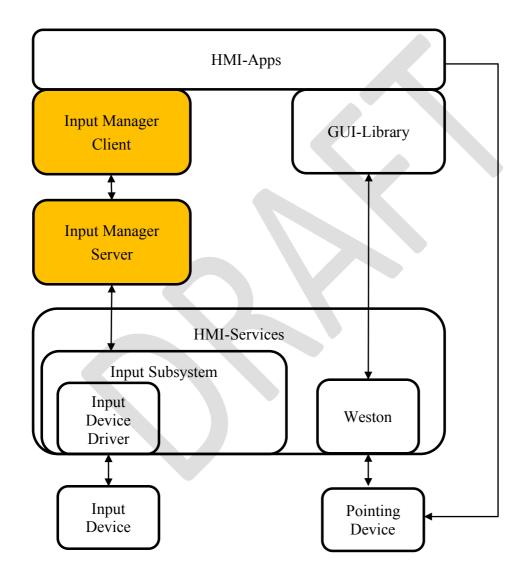


Following is this case of sequence chart.

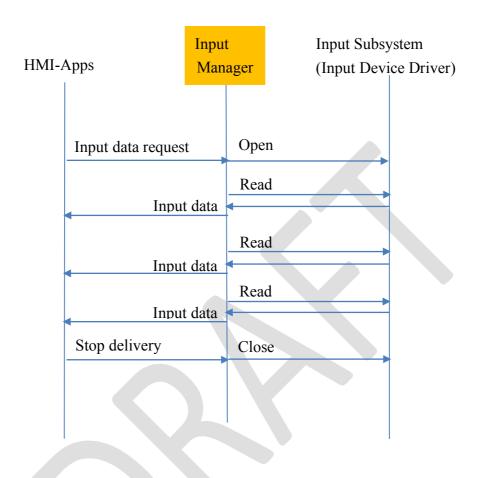


6.3.2. Input data from Vehicle Bus Access

Input Manager utilizes the function provided by Vehicle Bus Access.

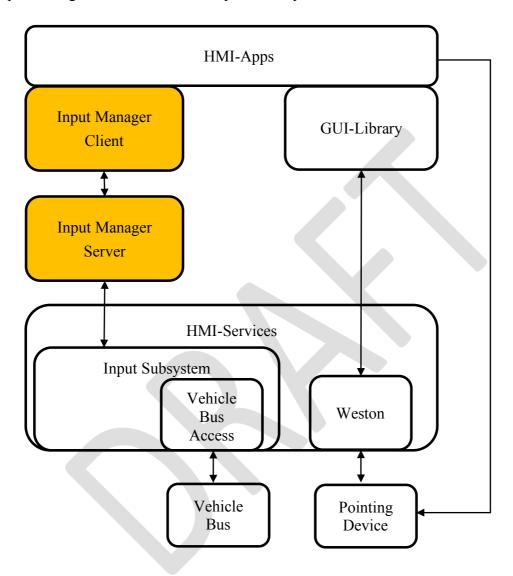

Following is this case of sequence chart.

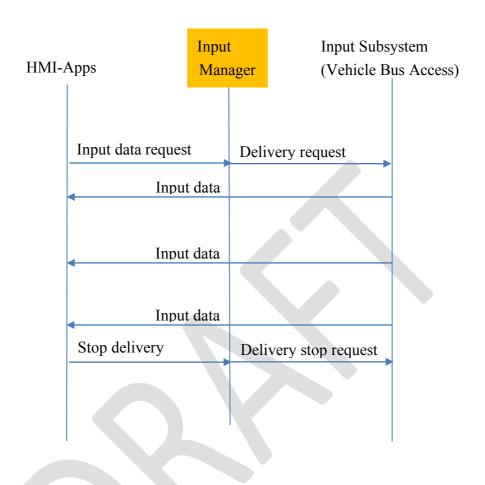


7. Home Screen

7.1. OverView

Home Screen is a component for performing user operation. It is possible to have different Home Screen for each in-vehicle device.

7.1.1. Related external components

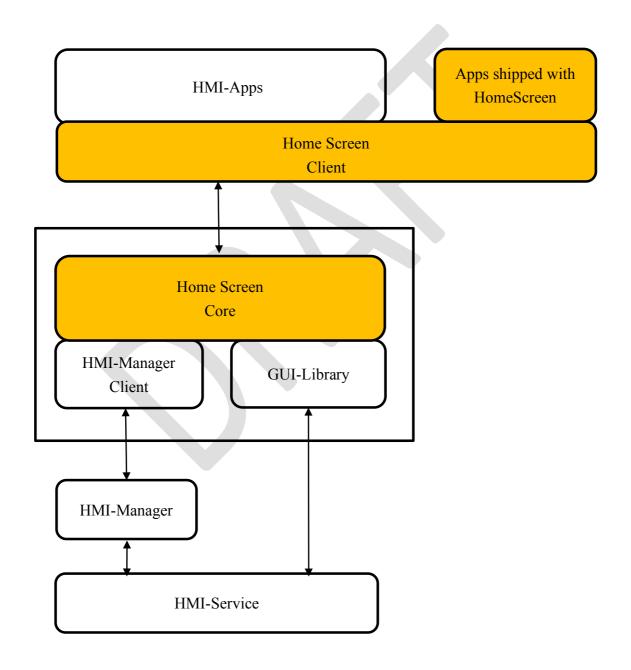

7.1.2. Internal Components

No	Function	Description		
1	Home Screen Client	API		
2	Home Screen Core	Home Screen CORE functions		
3	Apps Launcher	HMI-Apps		
4	Input Method Editor	HMI-Apps		



7.2. Home Screen CORE API

No	Function	R/W	Description
1	Home Screen Resources Control	R/W	Get/Set Resources
2	Short Cut key	W	
3	Status Bar	W	
4	Information Bar	W	
5	Home Key	W	
6	On Screen	W	
7	Notify	R	




7.3. HomeScreen initial processing

The HomeScreen performs the following processing at startup. For details, see the chapter of each manager.

7.3.1. Initial setting of 「Window Manager」

Setting Layer

HomeScreen needs to set up multiple layers including applications at startup. An example of setting of multiple layers is shown below.

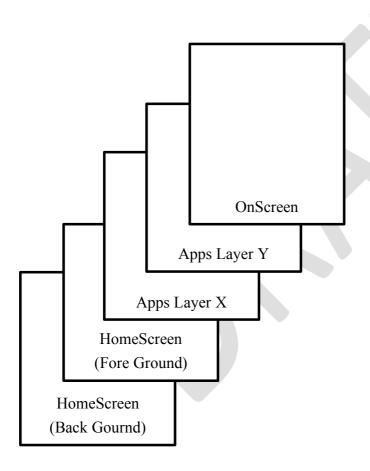

An application may monopolize one layer or share it.


Setting Area

HomeScreen needs to set multiple areas for $\lceil OnScreen\ Layer \rfloor$ and $\lceil HomeScreen\ Layer \rfloor$ at startup.



7.4. HomeScreen CORE functions

The standard Home Screen sample is shown below. (Sample)

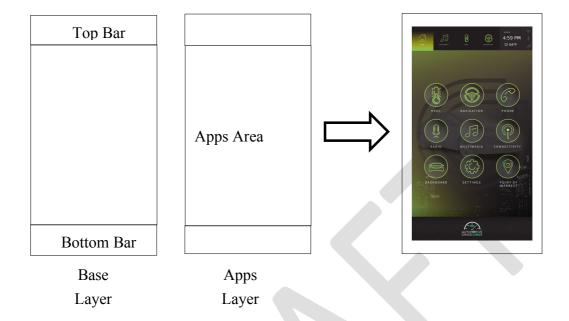

7.4.1. Shortcut key

The user selects an application to use with apps menu.


7.4.2. Status Bar

The Status Bar shows status information by notification command from each application.

7.4.3. Information Bar


The Information Bar shows application information by information data from each application.

In the sample, The Information Bar is displayed exclusively with the home key in the bottom Bar.

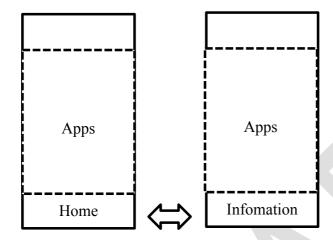

7.4.4. Home Key

HomeScreen hides the current application and returns to the home screen window. In the following example, the displayed application (app A) is not displayed and HomeScreen is displayed.

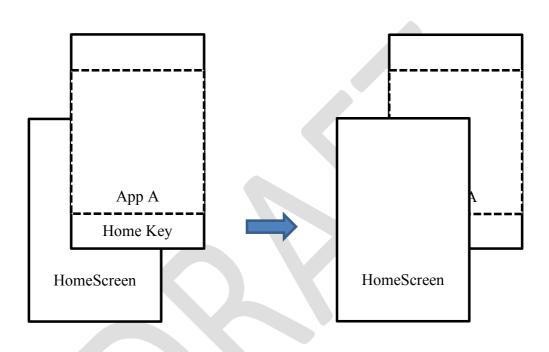

7.4.5. Apps Area


Apps Area is the area for the application to display.

Share Apps Layer

Each application needs to acquire screen rights to Window Manager.


Applications that lose screen rights are set to hide the area.

Depending on the screen size, multiple applications can share the Apps Layer.

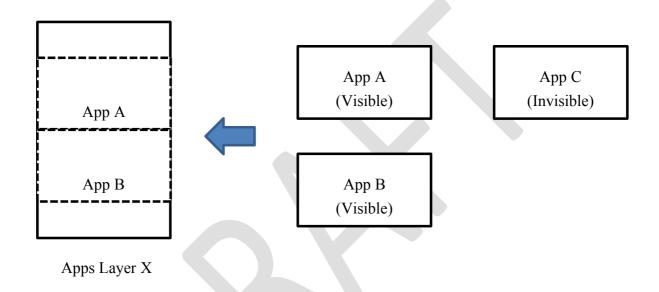

Stack Display

When an executing application calls another application, another application occupies the screen.

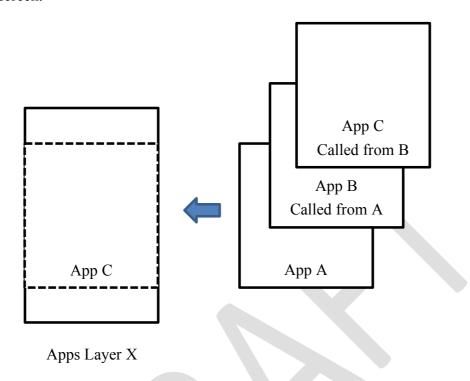




7.4.6. On Screen Area (Floating Area)

On Screen displays on the screen when notification from each application is received.

On Screen Sample

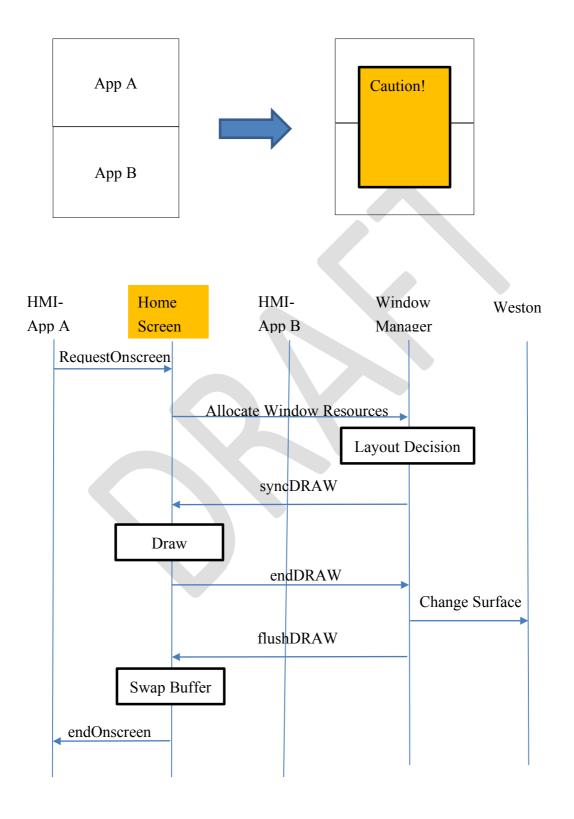


7.5. Apps shipped with HomeScreen

7.5.1. Apps launcher


The user can select necessary applications from the application menu.

The HomeScreen informs the application that it is selected.

If the selected application is not activated, the HomeScreen requests the application management to start the application.

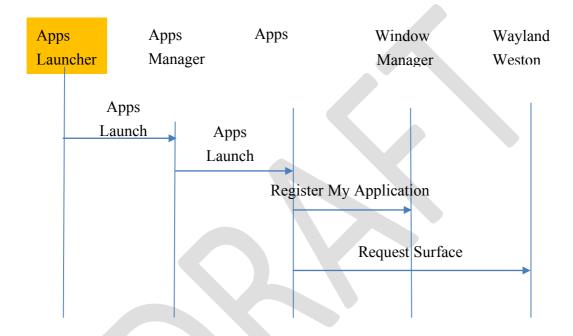

Multi Page Menu

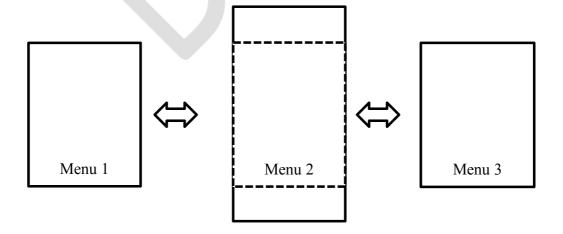

7.5.2. Input Method Editor(T.B.D)

The application can call IME with user operation.

